Description

- For inserts and modules of the EPIC® rectangular connectors

Article-Number	Article	Version	Conductor cross-section in mm²	Insulation diameter in mm	Surface	Stripping length In mm	Base-material
11241100	H-D 1.6 stamped	male	0,14 - 0,5	1,0 – 2,0	Ag	3,0 + 0,5	brass
11231100	H-D 1.6 stamped	female	0,14 - 0,5	1,0 – 2,0	Ag	3,0 +0,5	brass
11221000	H-D 1.6 stamped	male	0,5 - 1,5	1,8 – 2,8	Ag	4,0 ± 0,5	brass
11236100	H-D 1.6 stamped	female	0,5 - 1,5	1,8 – 2,8	Ag	4,0 ± 0,5	brass
11223500	H-D 1.6 stamped	male	1,5 - 2,5	2,5 – 3,5	Ag	4,0 ± 0,5	brass
11228500	H-D 1.6 stamped	female	1,5 - 2,5	2,5 – 3,5	Ag	4,0 ± 0,5	brass
11243100	H-D 1.6 stamped	male	0,14 - 0,5	1,0 – 2,0	Au	3,0 ± 0,5	brass
11233100	H-D 1.6 stamped	female	0,14 - 0,5	1,0 – 2,0	Au	3,0 ± 0,5	brass
11221300	H-D 1.6 stamped	male	0,5 - 1,5	1,8 – 2,8	Au	4,0 ± 0,5	brass
11238100	H-D 1.6 stamped	female	0,5 - 1,5	1,8 – 2,8	Au	4,0 ± 0,5	brass

Matching crimping tools

Article Number	Article description	Version	Notes	Picture
11147000	Crimping tool	In tool case	Without crimping dies, without locator	
11147001	Crimping machine	Pneumatic, 5 -1 0 bar	Without crimping dies, without locator	
11147170	Crimping dies	For 11147000 and 11147001	For contacts: H-D 1.6 stamped (0.5 - 1.5 mm²)	
11147190	Crimping dies	For 11147000 and 11147001	For contacts: H-D 1.6 stamped (1.5 - 2.5 mm²),	
11147300	Locator		Für H-D 1,6 Kontakte	
11161000	Removal tool		For contacts H-D 1,6 machined/stamped	

We reserve all rights according to DIN ISO 16016.
PD 0019/05_04.18EN

Drawing:

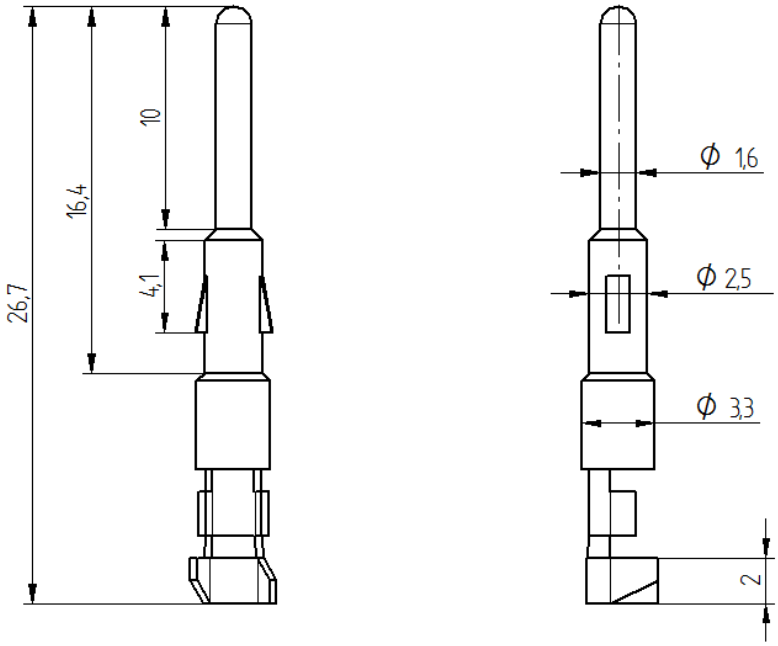

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

We reserve all rights according to DIN ISO 16016.
PD 0019/05_04.18EN